

LIGHTWAVE



Wide-distribution bollard fixture. Clean and effortlessly simple design bollard family with perfectly controlled wide-reaching light throw.




Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column


- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Anodised, high-purity aluminium reflector
- High-efficiency polycarbonate lens
- Integral control gear


Feature

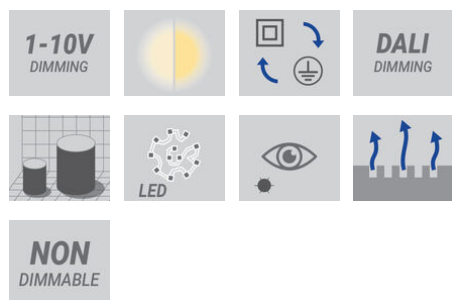


Optic



Product colour

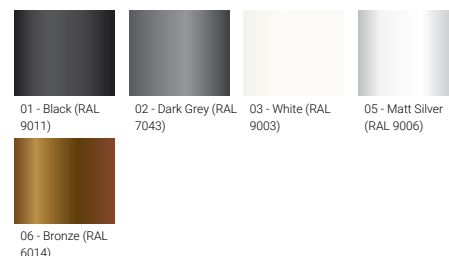

Special finishes upon request

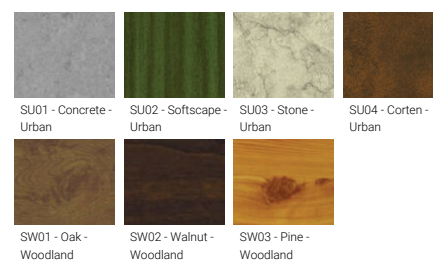

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Ø160 - 565 mm - Straight									
LIGHTWAVE 2	LW-10873	12 LED	27 W	448 - 475 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.5 kg	
Ø160 - 870 mm - Straight									
LIGHTWAVE 2	LW-10874	12 LED	27 W	448 - 475 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.5 kg	
Ø220 - 565 mm - Tapered									
LIGHTWAVE 1	LW-10871	12 LED	27 W	448 - 475 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.7 kg	
Ø258 - 870 mm - Tapered									
LIGHTWAVE 1	LW-10872	12 LED	27 W	448 - 457 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.7 kg	

Accessories


			
LW-10871			
LW-10872			
LW-10873			
LW-10874			

LW-10871


LW-10872

LW-10873

LW-10874

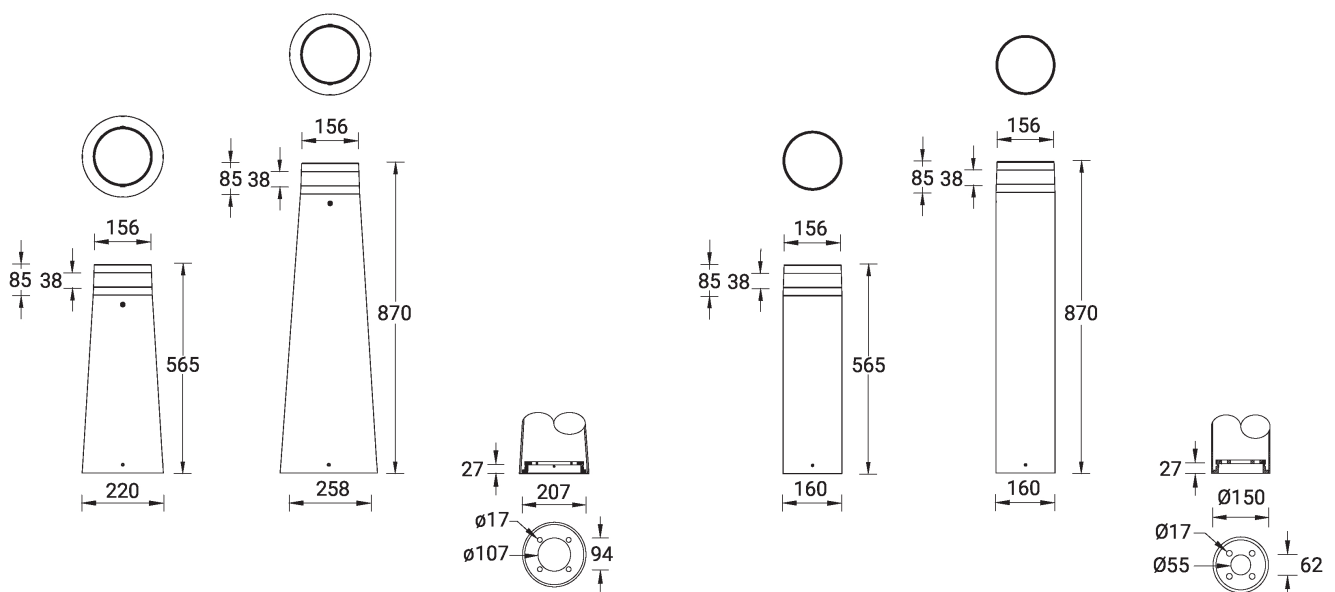

LIGHTWAVE



LIGHTWAVE

Surface facade luminaires

Wall-mounted surface grazing fixture. Clean and simple wall fixture with perfect grazing optic to bring out textures and colours.

<https://www.ligman.com/lightwave-surface-facade-luminaires-ligh-su3/>